




- 1) Start Audinate's Dante Controller Software
- 2) There, in Menu „View“ start the Dante Updater (Ctrl+U)
- 3) In Dante Updater at the upper right corner choose „Advanced Settings“

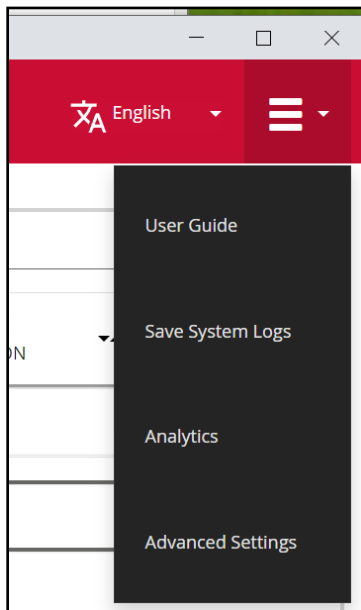


- 4) Enable all three check boxes and click "Apply"

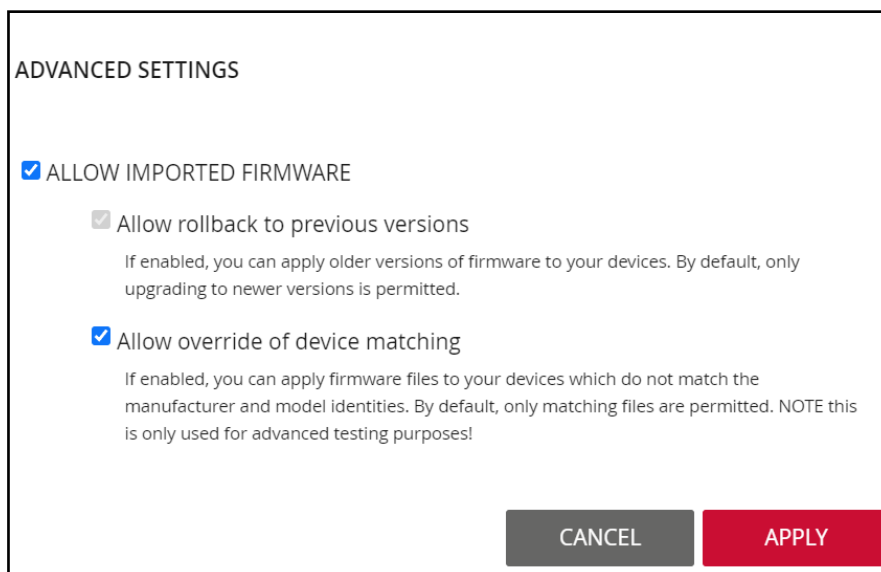


- 5) In „Library“ expand „Imported Files“ and click “Import Firmware”

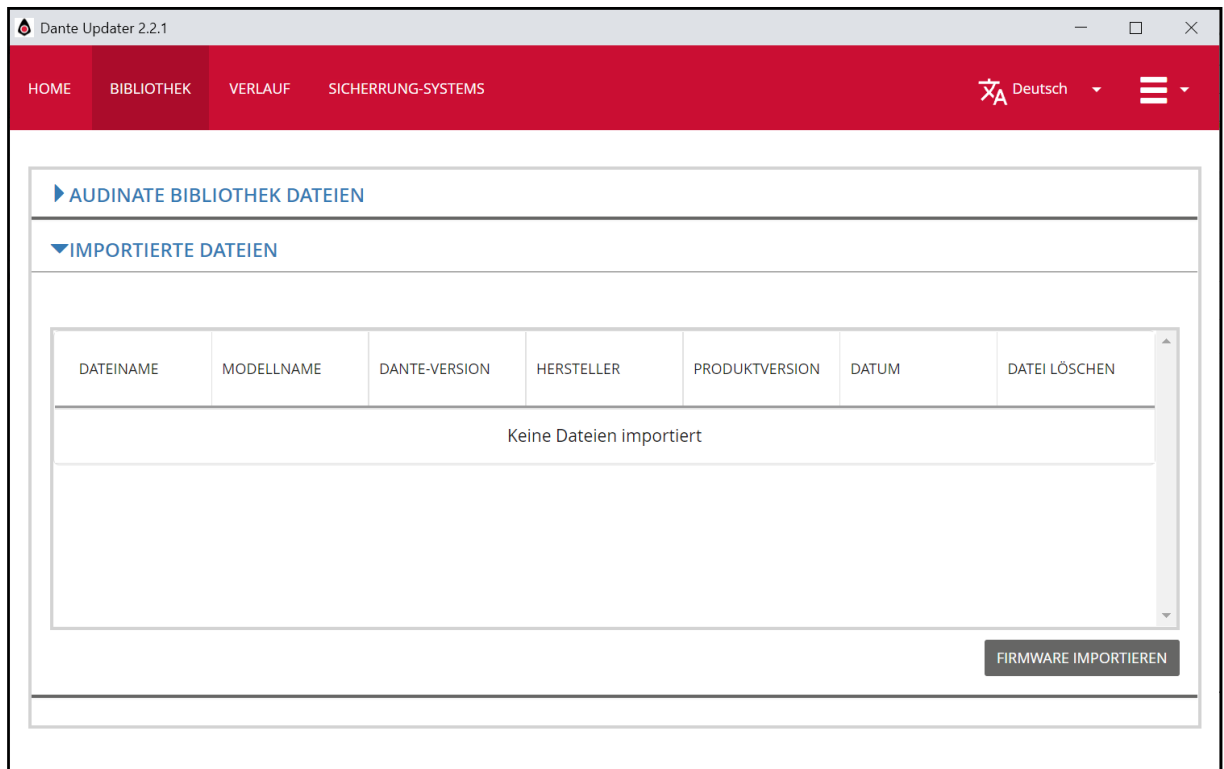


- 6) Choose the new firmware file. After the import, the list below looks this (depending on your firmware version):

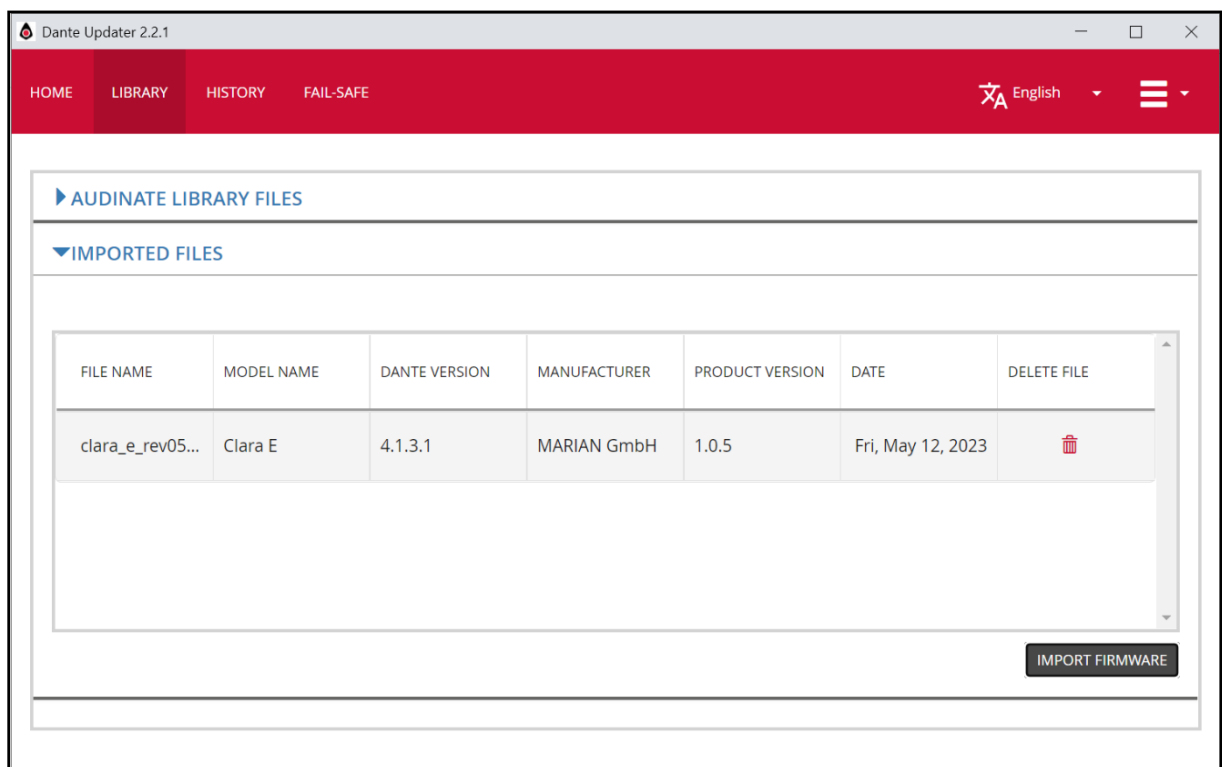

- 7) Go back to menu "Home", expand there „Imported Firmware Files“ and “CLARA_E-xxxxx”. There click on “Update” (here: „Reload“).

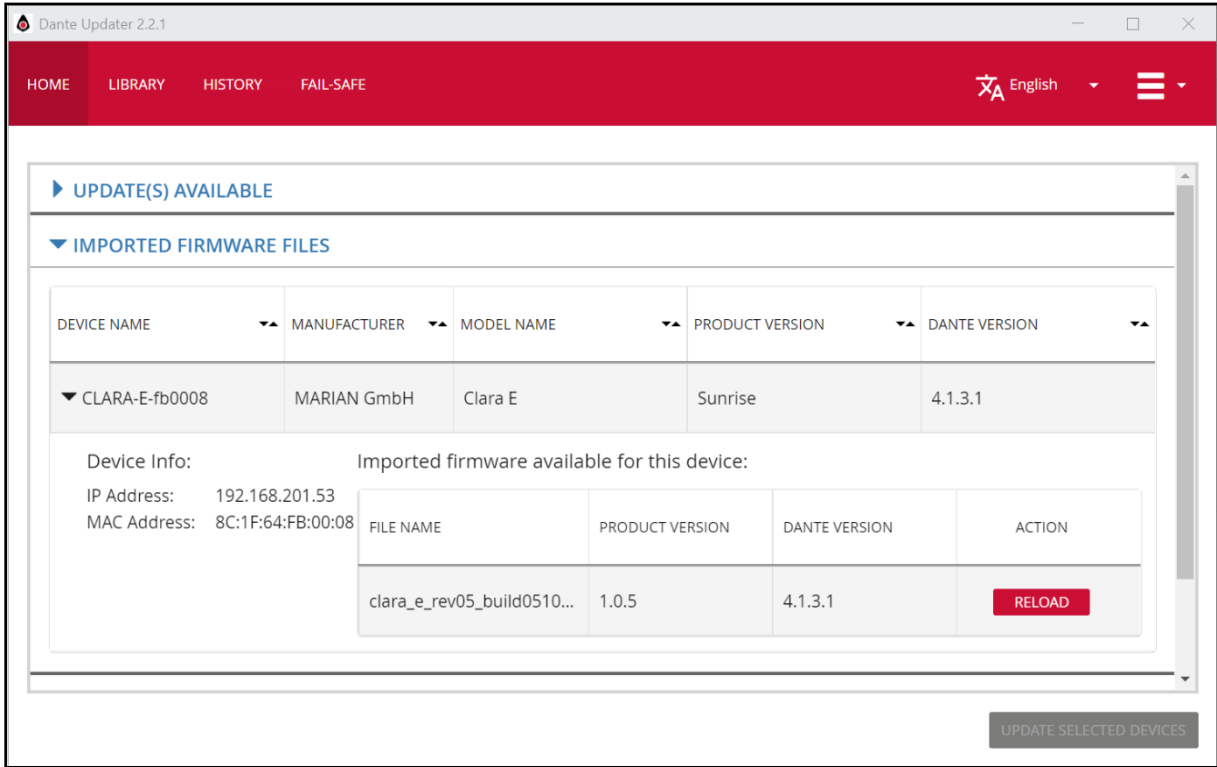

- 8) In the following dialog, enable the checkbox „I understand that ...“ and click “Update now”.

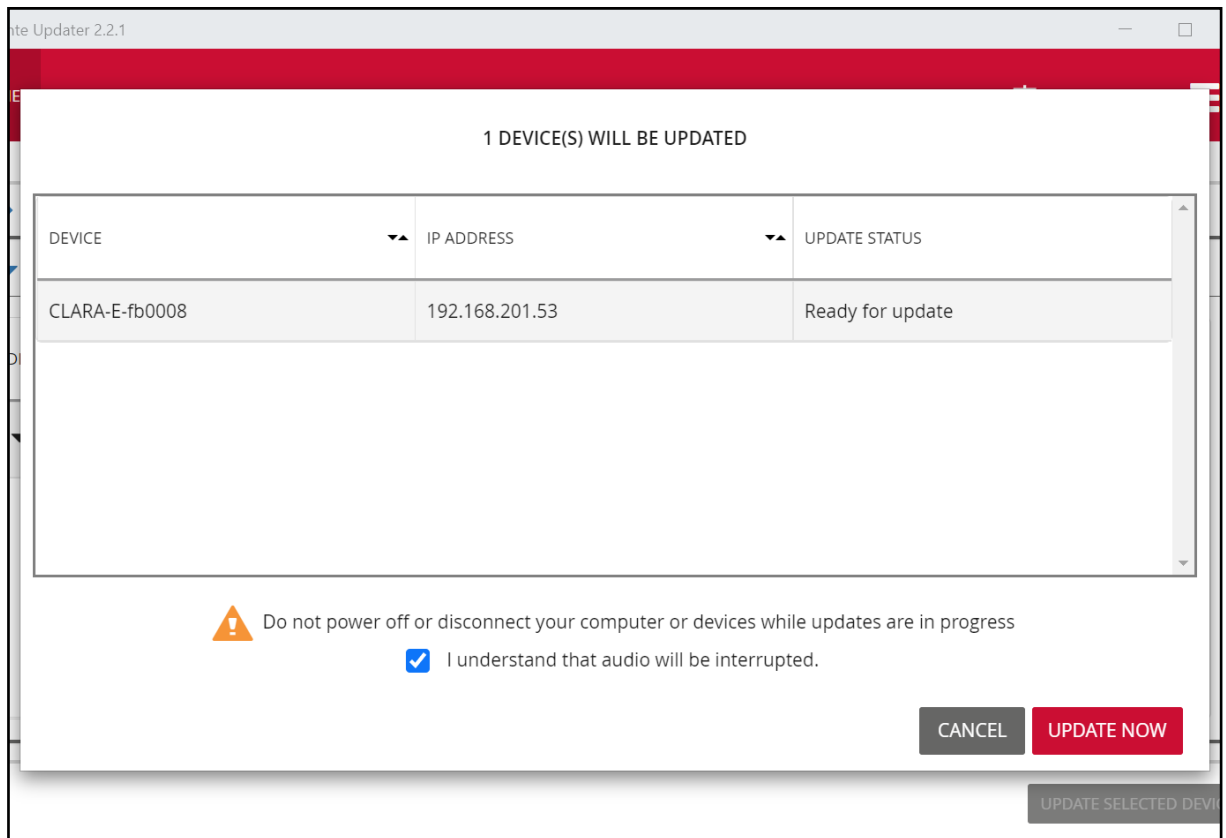

- 9) After the update has finished, the state “Manual restart required” is shown. Finish the last step in driver settings | firmware or restart the Clara E equipped computer.